


Y-GLOBE+CHECK VALVE

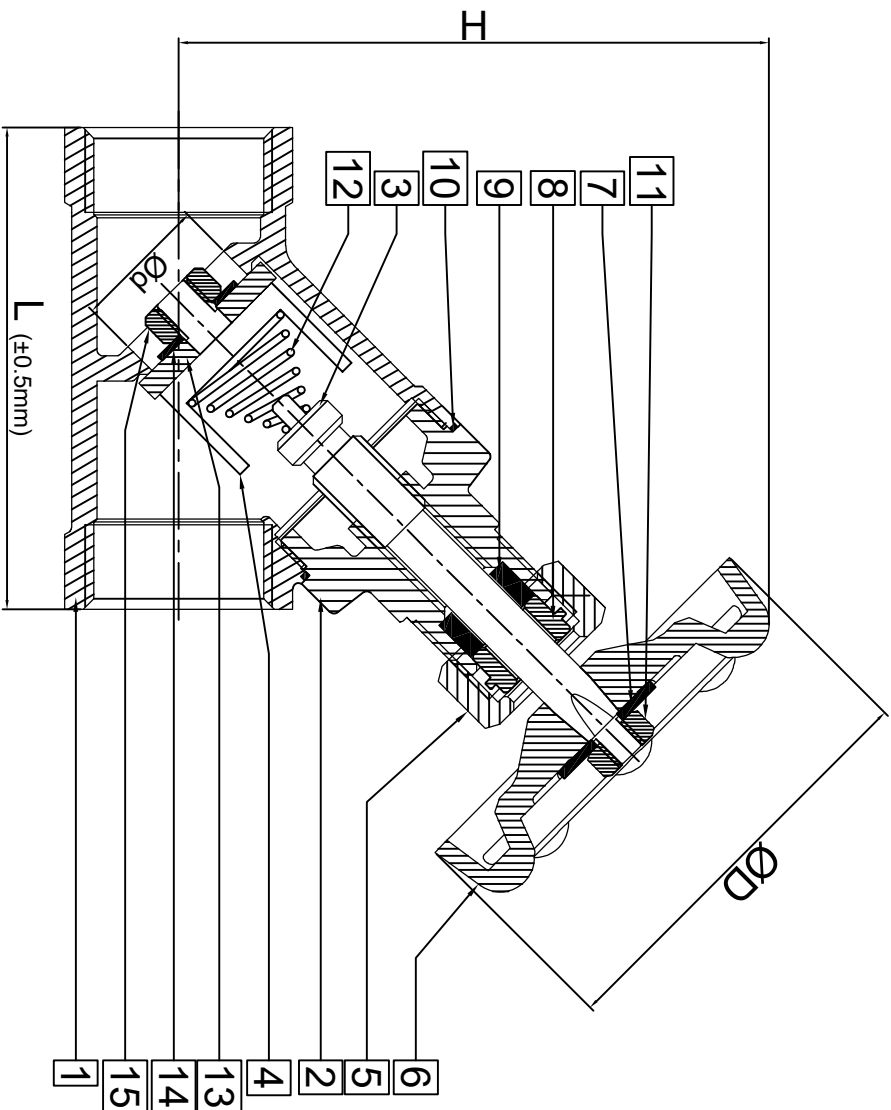

Dimension	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
L m/m	56.5	56.5	60.0	69.0	84.5	98.5	109.5	135.5
H m/m	84.0	84.0	98.0	98.0	113.0	122.0	126.5	152.0
Ød m/m	11.0	14.0	18.0	23.0	29.0	37.0	43.5	55.0
ØD m/m	61.0	61.0	61.0	61.0	77.0	83.0	83.0	95.0
Weight/kgs	0.25	0.23	0.37	0.48	0.72	1.03	1.27	2.13

- SPECIFICATIONS**
- .Size Range: 1/4"-2"
 - .Working Pressure: 600PSI
 - .Working Medium: Water, Oil, Gas
 - .Working Temperature: -10°C ~ 160°C
 - .Female Threaded End

No	Part	Q'ty	Material
1	Body	1	CF8M
2	Cap	1	CF8M
3	Stem	1	316
4	Disc Bonnet	1	CF8M
5	Cap Nut	1	304
6	Handling Wheel	1	Aluminum
7	Spin Washer	1	Aluminum
8	Gland Washer	1	304
9	Stem Packing	1	Teflon
10	Gasket	1	Teflon
11	Nut	1	304
12	Spring	1	316
13	Disc	1	Teflon
14	Disc Washer	1	316
15	Disc Nut	1	316